




ZIMBO'S

FLOORING & DECKING SOLUTIONS

Siberian Oak 3 Ply Rustic Technical Data Sheet

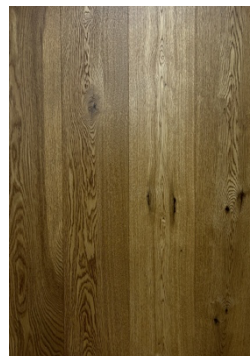

Product	Siberian Oak 3 Ply Rustic
Dimensions	189mm x 14mm x 1860mm with a 3mm top layer of European Oak.
Grading	Nature grade. Clean fine grained. Has small black filled knots with less than 8% sap wood.
Construction	11mm three layer base consisting of pine and poplar base, with a 3mm Oak layer from PEFC certified timber.
Guarantee	Zimbos Flooring Solutions offers a 5 year guarantee against delamination of the Oak veneer and the cracking or buckling of the floor board subject to normal conditions. This means in an environment with a relative humidity of 40 – 60%. This is subject to product being glued down with Wakol MS 228 adhesive, and Wakol PU 280 moisture barrier when concrete screed residual moisture (measured with Concrete Tramex meter) is above 4.5% moisture content.
Formaldehyde	Emission E1
Pentachlorophenol	Emission > 5%
Underfloor Heating	Temperature compliant to 27 degrees.

Installation method	Glue down (according to SAWLFA specifications).
----------------------------	--

2 Panther Park, 11 Berkley Road, Maitland, 7405

Tel: +27 21 511 4693

Fax: +27 21 511 4694

www.zimbostrading.co.za

www.loba.co.za

www.wakol.co.za

Reg No: 2002/023222/23

Vat No: 424 019 8855

Members of C.C.: D.O. Waddy & H.A du Toit