



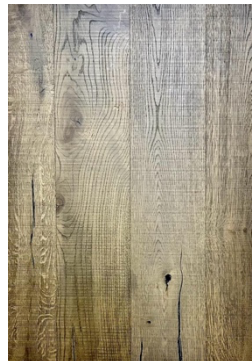

ZIMBO'S

FLOORING & DECKING SOLUTIONS

Oak Multilayer Vintage Technical Data Sheet

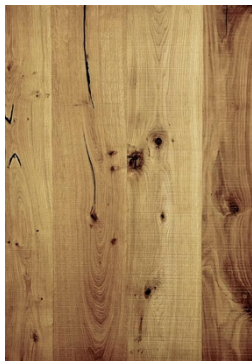

Product	Oak Multilayer 220mm x 15mm x 220mm Vintage.
Dimensions	220mm x 15mm x 220mm with a 4mm top layer of European Oak.
Grading	Extra rustic grade - Deep brushed with saw marks. Has large knots and large half-filled cracks with black filler in the boards. Has sap wood.
Construction	11mm Birch multilayer base consisting for excellent stability, with a 4mm Oak layer from PEFC certified timber.
Guarantee	Zimbos Flooring Solutions offers a 5 year guarantee against delamination of the Oak veneer and the cracking or buckling of the floor board subject to normal conditions. This means in an environment with a relative humidity of 40 – 60%. This is subject to product being glued down with Wakol MS 228 adhesive, and Wakol PU 280 moisture barrier when concrete screed residual moisture (measured with Concrete Tramex meter) is above 4.5% moisture content.
Formaldehyde	Emission E1

Pentachlorophenol	Emission > 5%
Underfloor heating	Temperature compliant to 27 degrees.
Installation method	Glue down (according to SAWLF specifications)

2 Panther Park, 11 Berkley Road, Maitland, 7405

Tel: +27 21 511 4693

Fax: +27 21 511 4694

www.zimbostrading.co.za

www.loba.co.za

www.wakol.co.za

Reg No: 2002/023222/23

Vat No: 424 019 8855

Members of C.C.: D.O. Waddy & H.A du Toit